



16F MT Ferrule 4mm Length is based on the proven alignment structure of MT-16 ferrules. Can be applied in on-board fiber management, as well as incorporation into transceivers.

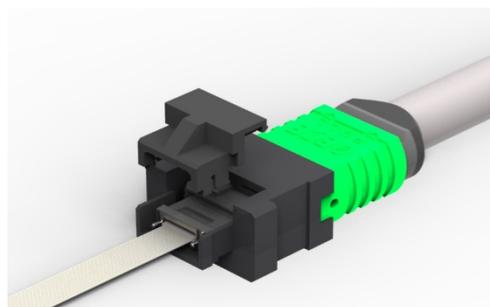

**Features**

- 16 fibers at 250 micron pitch
- Compatible with 250, 200, and 165 micron fibers
- Interrelated with MT-16 technology
- Low insertion loss for SM APC and MM APC applications

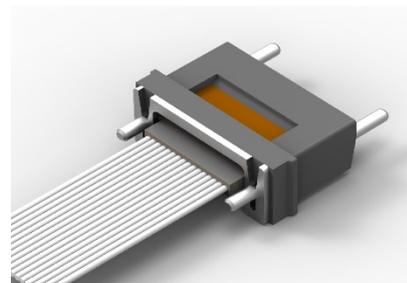

**Optical Performance**

	<b>Single-mode Standard</b>
Insertion Loss	0.25dB Typical (All Fibers) 0.5dB Maximum (Single Fiber)
Return Loss	> 60dB (8° Angle Polish)

**Ferrule Dimensions**

