


2F SM LC/LC Cable for DR1 Connection are the linking cables between Optical Patch Panel and equipment racks such as servers or SAN's. One end of the jumper is terminated to a LC patch panel or a MPO-LC cassette. The other end can be connected to a DR1 module. With a diameter of 2 mm Uniboot LC jumpers represent a very compact and high-density connection method between racks or zones in the data center.

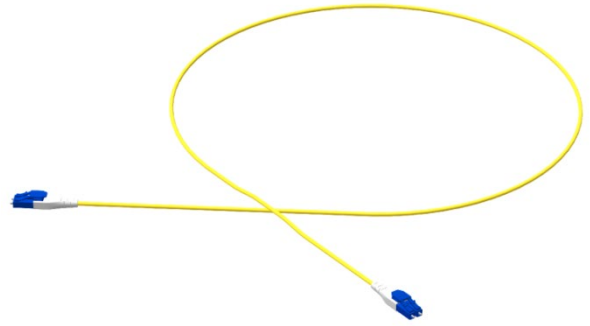

Features & Benefits

- Low insertion loss and high return loss, meeting the transmission standard of optical fiber cabling system.
- Follow the 100G SFP standard by using LC Uniboot optical fiber connector.
- All of products meet the relevant standards of environmental policy, environmental protection and flame retardant.

Optical Performance

	Single-mode Standard
<i>Insertion Loss</i>	<i>0.15dB Typical ,0.3dB Maximum</i>
<i>Return Loss</i>	<i>> 50dB (UPC)</i>